



LDPE / LLDPE BLOWN FILM EXTRUSION LINE

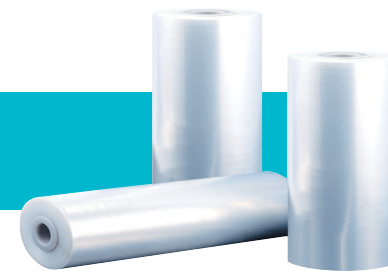

■ Characteristics

- High efficiency screw and cylinder with European technology.
- Mixing head and force feeding section of screw for even dispersion of ingredients.
- Spiral die-block and accurate temperature control for film quality and increased output.
- Easily accessible take-off unit for easier operation.

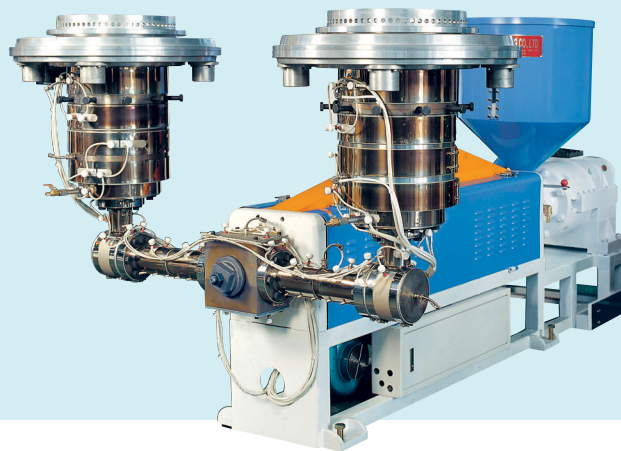

■ Specifications

Items	Model	YJF-Ø50/800L	YJFD-Ø60/600L
Applicable Resin		LDPE/LLDPE	LDPE/LLDPE
Screw Diameter		Ø50	Ø60
Film Thickness		0.02-0.1mm	0.02-0.1mm
Film(roller) Width		700mm(800mm)	500mm(600mm)
Production Capacity		60kg/Hr	100kg/Hr
Main Motor		A.C. 30Hp with Inverter	A.C. 50Hp with Inverter
Type of Winder		Semi-Auto Surface or AutoSurface Winder	
Dimension (L X W X H)		6.5m×3m×6.5m	6m×4m×6.5m

Specification are subject to change without notice.

YJF-Ø50/800L
SINGLE-HEAD TYPE

YJFD-Ø60/600L
TWO-HEAD TYPE