

HDPE BLOWN-FILM EXTRUSION LINE




For Making Shopping Bags

High speed blown film line with up-to-date technique.
 Fine gauge and good quality polyethylene films, High molecular polyethylene films can also be blown.

■ Main characteristics

- High efficiency screw and cylinder with European technology.
- Mixing head and force feeding section of screw for even dispersion of ingredients.
- Spiral die-block and accurate temperature control for film quality and increased output.
- Easily accessible take-off unit for easier operation.
- Special internal stabilizing bar and external iris for stabilized bubble at hi-speed extrusion.
- LDPE or LLDPE films with additional set of die and air ring (optional)

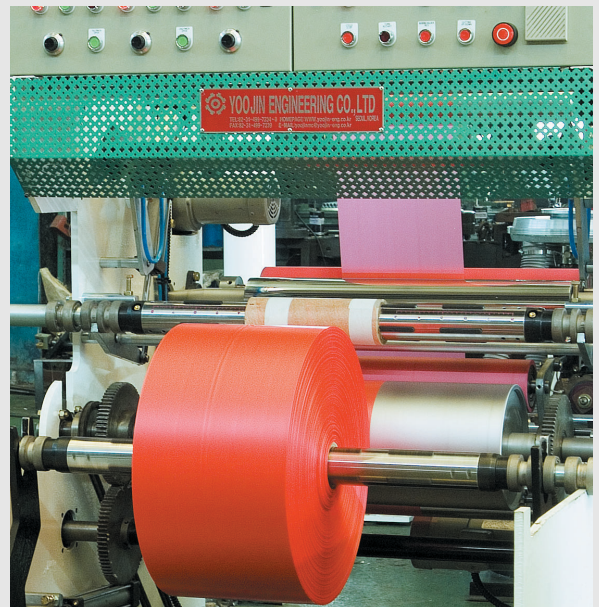

■ Specifications

ITEMS	MODEL	YJF-ASW - ϕ 50/800L	YJF-ASW - ϕ 60/1200L
SCREW DIAMETER		ϕ 50mm	ϕ 60mm
FILM THICKNESS		0.008mm ~ 0.15mm	
DIAMETER OF DIE		ϕ 50 / ϕ 80mm	ϕ 90 / ϕ 120mm
FILM WIDTH (MAX.)		700mm	1100mm
PRODUCTION CAPACITY(MAX.)		65kg/hr	85kg/hr
MAIN MOTER		AC 30HP +Inverter	AC 40HP +Inverter
WINDER TYPE		AUTO OR SEMI-AUTO SURFACE WINDER	
DIMENSION (L x W x H)		3.5m x 2.5m x 4.5m	6.5m x 3.1m x 6.0m

Specification are Subject to Change Without Notice.



YOOJIN ENGINEERING CO., LTD.

Head office & Factory :
 (Shihwa Ind. Complex, 3ra 615 ho)
 #1377-14, Jeongwang-dong, Shiheung-city, Gyeonggi-do, Korea
 TEL : 82-31-499-7234~8 FAX : 82-31-499-7239
<http://www.yoojin-eng.co.kr>
 E-mail: yoojinmc@yoojin-eng.co.kr