TWO HEAD BLOWN FILM EXTRUSION LINE

Extremely economical way for production of Two head films for sturdy shopping bags

Characteristics

- High efficiency screw and cylinder with European technology.
- Mixing head and force feeding section of screw for even dispersion of ingredients.
- Spiral die-block and accurate temperature control for
- stabilized bubble at hi-speed extrusion.





YJFD -Ø60/600L (B TYPE)






■ Specifications

Items Model	YJFD - Ø50/500L	YJFD - Ø60/600L	YJFD - Ø65/800L
Screw Diameter	ø 50mm	ø 60mm	ø 65mm
Film Thickness	0.008mm ~ 0.15 mmble		
Film(roller) Width	400mm(500mm)	500mm(600mm)	700mm(800mm)
Production Capacity	60kg/hr(Max)	80kg/hr(Max)	95kg/hr(Max)
Main Motor	V.S 30 P, Inverter(Option)	V.S 50 P, Inverter(Option)	V.S 60 P, Inverter(Option)
Winder Type	Semi-Auto Surface Winder or Bobbin Shaft Winder		
Dimension (L x W x H)	2.9m×4.2m×4m	4m×5.2m×4.5m	4.2m×5.4m×4.5m

Specification are subject to change without notice.

■ Main Products

- Flat yarn manufacturing lines.
- Circular loom for woven sacks and sheets.
- Extrusion laminating machines.
- Compounding machine for PE, PP, Nylon, Polyester, PVC resin.
- PP, LD & HDPE, EVA blown film making machines.
- PP, PE Casting(CPP, CPE) film manufacturing machines.
- PVC & HDPE pipe & hose manufacturing machines.
- Corrugating Pipe manufacturing machines. (spiral, ring type)
- PP, HDPE, Nylon monofilament making machines.
- PP band manufacturing machines.
- Plastic sheet manufacturing machine. (PVC, PP, PS, ABS)
- Super henschel mixer & cooling mixer.
- 3-Layer blown film manufacturing machine.
- Waste recycling machine for · PP, LD & HDPE, PS, ABS.
- Other Plastic machinery.

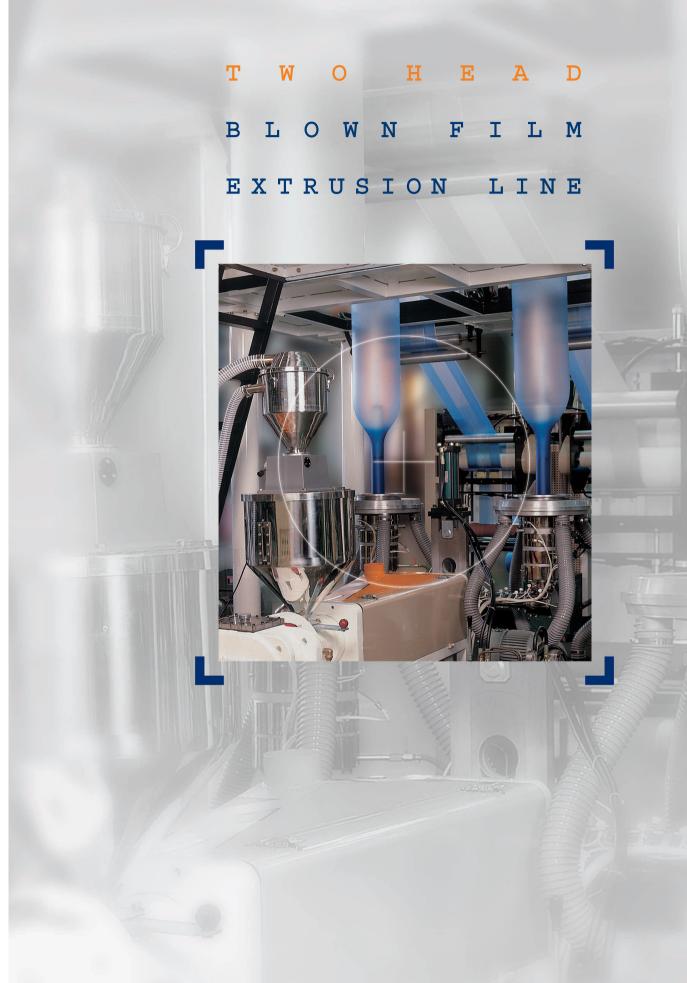



Head office & Factory
(Sihwa Industrial Complex 3-Ra-615)
#1377-14, Jeongwang-dong, Siheung-si,
Kyonggi-do, Korea.
TEL:82-31-499-7234~8 FAX:82-31-499-7239
http://www.yoojin-eng.co.kr
E-mail:yoojinmc@chollian.net