

YOOJIN ENGINEERING CO., LTD.

MODEL : YJFL- \varnothing 50/800L




BLOWN-FILM EXTRUSION LINE

High speed blown film line with up-to-date technique. Fine gauge and good quality polyethylene films, High molecular polyethylene films can also be blown.

■ Main characteristics

- High efficiency screw and cylinder with European technology.
- Mixing head and force feeding section of screw for even dispersion of ingredients.
- Spiral die-block and accurate temperature control for film quality and increased output.
- Easily accessible take-off unit for easier operation.
- Special internal stabilizing bar and external iris for stabilized bubble at hi-speed extrusion.
- LDPE or LLDPE films with additional set of die and air ring (optional)

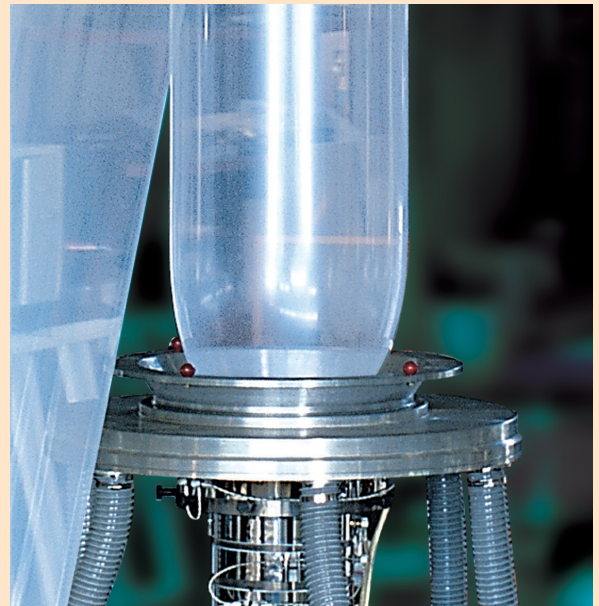

SPECIFICATIONS

ITEMS \ MODEL	YJFL - ø 50/800L	YJFL - ø 60/1200L	YJFL - ø 70/1800L
SCREW DIAMETER	ø 50mm	ø 60mm	ø 70mm
FILM THICKNESS	0.03mm ~ 0.15 mm		
DIAMETER OF DIE	ø 200mm	ø 300mm	ø 400mm
FILM WIDTH (MAX.)	700mm	1100mm	1700mm
PRODUCTION CAPACITY(MAX.)	65kg/hr	85kg/hr	145kg/hr
MAIN MOTER	V.S. 30HP	V.S. 40HP	V.S. 75HP
WINDER TYPE	AUTO OR SEMI-AUTO SURFACE WINDER		
DIMENSION (L x W x H)	3.5m x 2.5m x 4.0m	6.5m x 3.1m x 6.5m	8.2m x 4.2m x 8.2m

Specification are Subject to Change Without Notice.



YOOJIN ENGINEERING CO., LTD.

Head office & Factory

(Sihwa Ind. District 3ra 615ho)

#1377-14, Jeongwang-dong, Siheung-si,

Kyonggi-do, Korea.

TEL : 82-31-499-7234~8 FAX : 82-31-499-7239

<http://www.yoojin-eng.co.kr>

E-mail: yoojinmc@chollian.net